


# Mackworth has a comprehensive range of products to meet your mobility needs:

- Fixed ceilinglifts
- Portable ceiling lifts
- Gantry systems
- SteadyTrack
- Slings

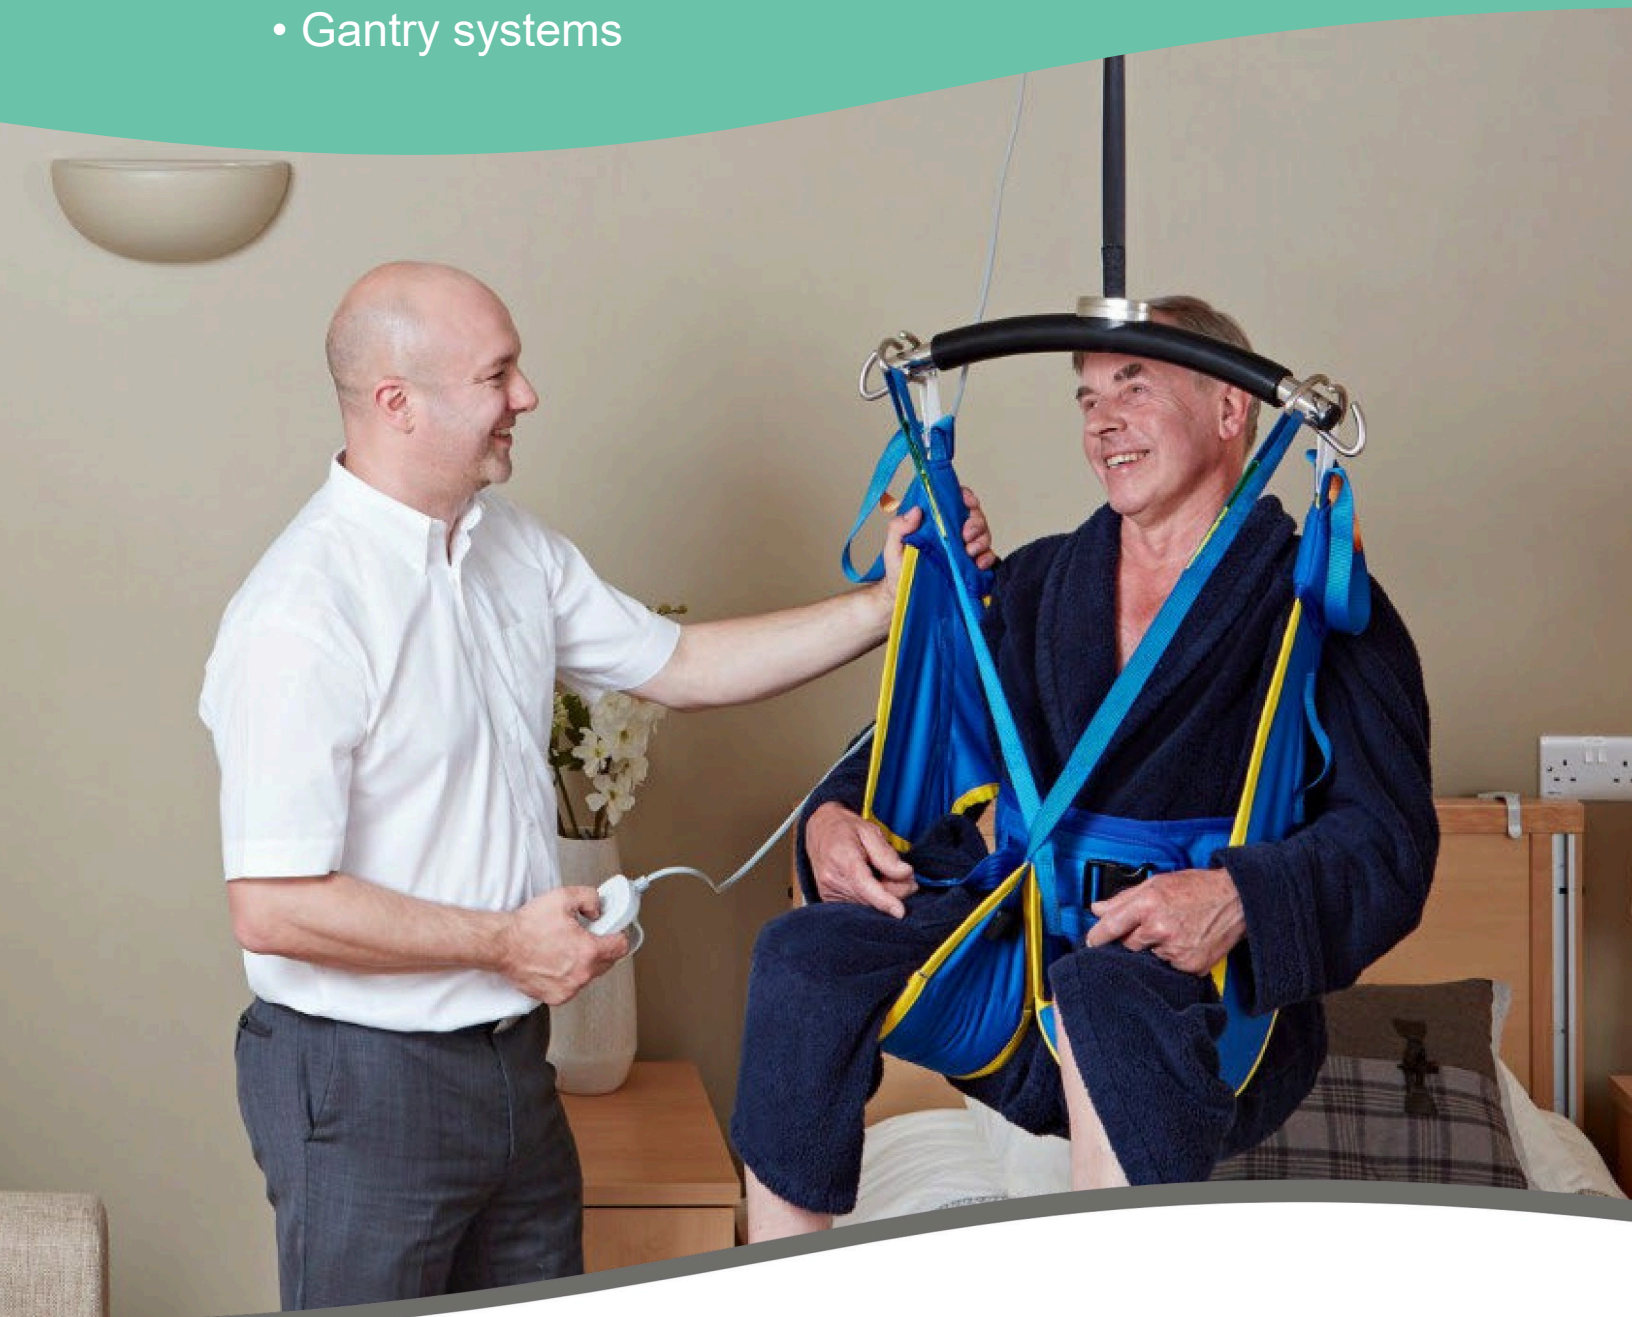

mackworth

lifeway  mobility

*“Mackworth are reliable, great value and easy to deal with.”*



## *Mackworth are experts in the safe moving and handling of patients.*

Mackworth is part of a growing multi-national medical device group which provides safe patient handling, pressure area care and specialist seating solutions to health and care providers in home care, long term care, acute care and educational settings.

Headquartered in the UK with over 600 employees, operating in 84 countries around the world, we have a mission to transform the quality of life of people with health and mobility conditions by providing solutions that offer choice, value for money, and help to make care easier.

mackworth

### **Value**

Great quality products that are competitively priced, offering you value for money and choice.

### **Quality Assurance**

Mackworth products are designed and manufactured at our 50,000 sq ft facility in the UK giving you and your clients reassurance they have complied with the highest quality and safety standards.

### **Reliability**

We are a trusted supplier to a growing distributor network in 84 countries, with a reputation for offering quality, value and a great service.

### **Knowledge and Expertise**

With over 35 years-experience providing product and service solutions to health and care providers, our products are backed by expert knowledge and a wealth of training and educational resources.

### **Customer Service**

We have a dedicated US warehouse and a distributor with in-depth product and local market knowledge who will tailor solutions to meet your needs and be your point of contact every step of the way.

# TX600 Advanced

## Fixed Ceiling Track Lift

mackworth

The TX600 makes it easy to move mobility impaired individuals with minimal strain or risk to the caregiver, while providing complete safety, dignity and comfort for the client.

*The TX600 ceiling lift should be used in conjunction with a suitable fixed ceiling track system and a moving and handling sling.*

### Power traverse

All track types except Guldmann track variant. The lift comes with a self-powered motor which reduces physical load on the carer.

### Return to charge

All track types except Guldmann track variant. With the press of a button the hoist will return to its charger using an in-built motor.

### Operating a powered turntable

Mackworth track only. A powered turntable is installed where two rails intersect, which enables the rail system and ceiling hoist to run in several directions.

### Operating a power XY system

Mackworth track only. Power XY systems position the patient exactly where you need them. Powered by high torque motors this system moves in all directions, which helps makes care easier.

### Constant charge

Prism and Guldmann track. A convenient, easy charge system allows the hoist batteries to charge from any position in the rail.

### Quick release Trolley set

All track except Guldmann track (manual traverse only). Quick release trolley set releases the lift from the rail quickly, making it easy to move the lift from room to room.



*The TX600 makes it easy to move mobility impaired while providing complete safety, comfortably, and with dignity.*

# TX600 Advanced

## Fixed Ceiling Track Lift

mackworth

### Product Features:

#### Low Profile

Low profile ceiling lift with 78.74" (2000mm) lifting range.

#### Wet Rooms & Bathrooms

Ideal for use in wet rooms and bathrooms.

#### Smooth High Torque Motor

Smooth running lifting tape and high torque motor, with powered traverse option available.

#### Lift Capacity

Transfer patients up to 600 lbs.


#### Discreet Design

Unobtrusive design which doesn't take up floor space or cause trip hazards and is complete with in-track charging point.



### Technical Specifications

Lifting capacity (SWL)	600lbs (272kg)
Lifting range	78.74" (2000mm) lift
Operation	Powered traversing
Lifting speed (SWL)	1.16"/s (29.52mm/s)
Lifting speed (no weight)	2.54/s (64.52mm/s)
Lowering speed (SWL)	2.14/s (54.48mm/s)
Lowering speed (no weight)	2.39/s (60.75mm/s)
Battery Capacity for Raising/Lowering (SWL)	35 Lifts (Top 500mm of Lift Tape)
Battery Capacity for Raising/Lowering (200kg/440lbs)	60 Lifts (Top 500mm of Lift Tape)
Battery Capacity for Raising/Lowering (100kg/220lbs)	120 Lifts (Top 500mm off Lift Tapes)
Weights (SWL)	600lbs (272kg)
Lift	22.05lb (10kg)
Lift with traverse motor	23.14lb (10.5kg)

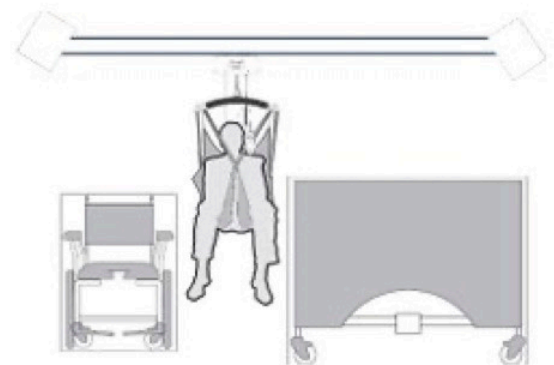

# CP440P

## Portable Ceiling Hoist

mackworth

The **CP440P** lift makes it possible to move mobility impaired individuals with minimal strain or risk to the caregiver, while providing complete safety, dignity and comfort for the client.

The **CP440P** lift should be used in conjunction with a suitable track system, such as a Mackworth Portable Gantry System or fixed ceiling track and a patient sling.

### Features and benefits:

#### Portability

These lifts can be moved between different rooms or in different areas where a single lift may be needed to assist in multiple rooms.

#### Usability

Easy to set up and use portable ceiling lifts are user-friendly with simple controls while being adjustable to accommodate different spaces.

#### Space Saving

Portable ceiling lift can be stored away when not in use, which frees up space.

#### Safety


Portable ceiling lifts promote safety when transferring from beds to chairs, chair to bed, or chair to toilet, thus reducing the risk of injury to both the caregiver and individual.

#### Flexibility

Adaptable to various needs and preferences, portable ceiling lifts can be used with various types of slings and attachments.

#### Power Source

While some units may be plugged in to an outlet, others may be battery operated.

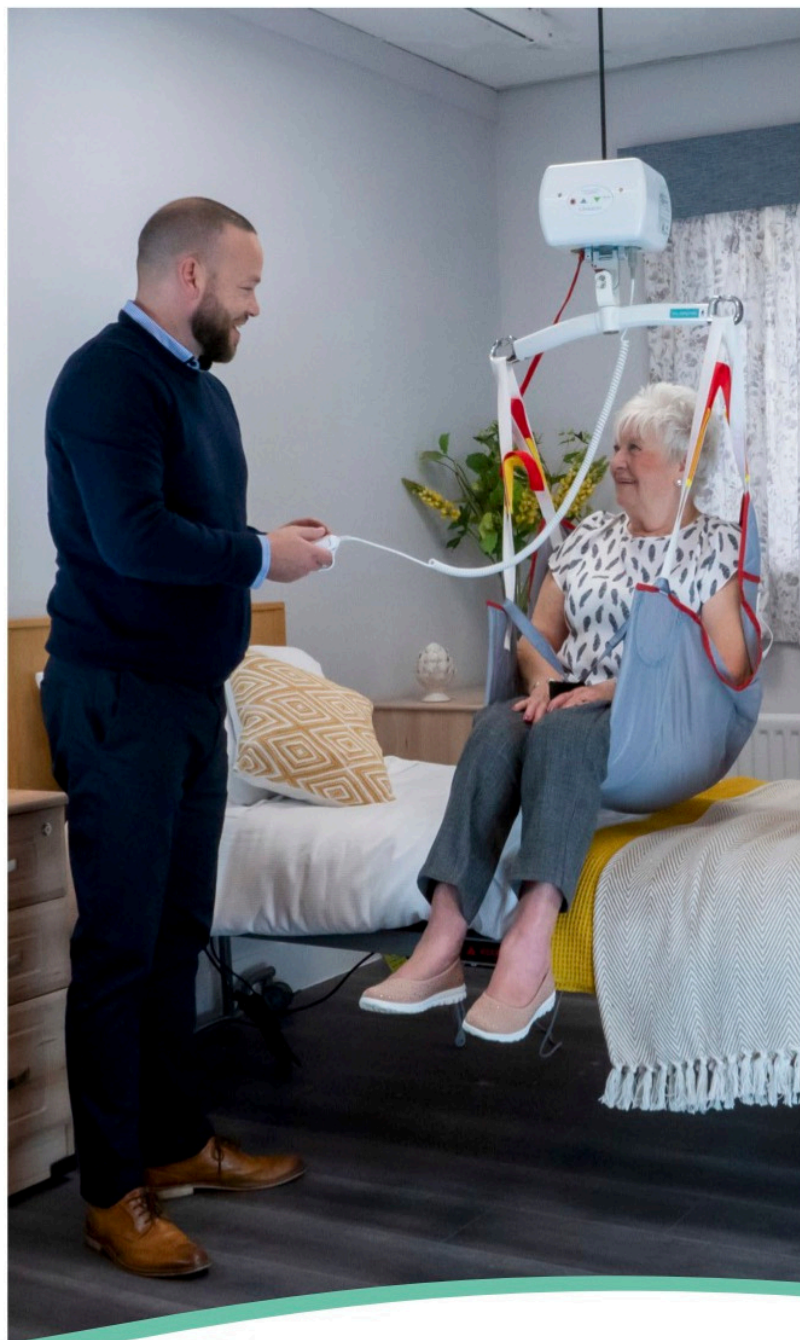

*The CP440P promotes dignity and comfort for the patient and reducing the risk of injury for the caregiver.*


# CP440P

## Portable Ceiling Hoist

mackworth


### Technical Specifications

Max safe working load	440lb (200kg)
Total weight (unboxed)	9.9lb
Length	8.19" (208mm)
Height	5.87" (149mm)
Width	6.97" (177mm)
Lifting range	up to 82.68" (2100mm)
Batteries	2 x 12V - 3.3Ah Nimh
In track charging	not available



Shown in the image opposite are the 3 functions of the hand controller for hoist.

- A. "UP" when pressed
- B. "Down" when pressed
- C. EMERGENCY LOWER when pressed

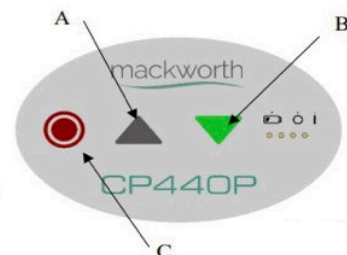

# FSG440

## Free standing Gantry System

mackworth

### ***Portable Lift Gantry***

Offering the confidence of patient lifting without permanently altering a room, portable lift gantry systems are easy to assemble and provide safe patient transfers.

**The FSG440** makes it easy to move mobility impaired individuals with minimal strain or risk to the caregiver, while providing complete safety, dignity and comfort for the client or family member.

**The FSG440** is designed to work with a portable lift system such as our CP440P. Use of other portable lift units with this system may be possible. However, please contact your local authorized dealers assemble, obtain approval before use.

**The FSG440** can be used to lift and transfer individuals from a bed, chair or similar fixture. The length is adjustable and thus can be assembled to suit a wide range of applications.

**The FSG440** is easy to assemble, and no tools are required. It is also light in weight and once dismantled, it can easily be moved to another location such as a hotel or house.



***The FSG440 is used to lift, position and transfer clients or mobility impaired family members..***

# FSG440

## Free standing Gantry System

mackworth

### Technical Specifications

User weight limit (max rated load)	400lb
Frame construction material	Aluminium
Total weight (boxed)	59.74lb (27.1kg)
Legs weight	8.37lb (3.8kg)
Track/trolley weight	31.96lb (14.5kg)



### Features and benefits:

#### Greater Independence at Home

Allows end users to stay in their own home. Providing a safe, dignified, and comfortable transfer for both end user and caregiver.

#### No Structural Alterations

No structural alterations are required to the room or ceiling.

#### Easy Assembly

Tool-free assembly may be completed by one person (two-person assembly is recommended).

#### Lift Capacity

Transfer Patients up to 440 lbs. (200 kg)

#### Adjustable Length

Can be assembled to suit a wide range of applications and length is adjustable.



# SteadyTrack

## Two Post Lift Stand System

mackworth

The SteadyTrack is a safe, high performance and portable free-standing lift stand which, together with a track and a lift unit, functions as a stationary lift system. The SteadyTrack allows customers to safely adjust the length of track up to 22'.

It is made of aluminum, which makes it light in relation to its large lifting capacity. The design is both simple and practical and makes SteadyTrack one of the sturdiest freestanding lift stands on the market.

SteadyTrack is very easy to assemble and disassemble and therefore easy to move to locations where there is a need for lifting. You can create many safe and flexible lifting solutions that are ideally adapted for all settings and users.

### **Features and benefits:**

#### **Easy & Quick Assembly**

Avoid fixed installation and related costs.

#### **Multiple Length Option**

Accommodates any length up to 22'.

#### **Weight Capacity**

Transfer patients up to 600 lbs.

#### **Lift Options**

Available for use with Mackworth portable and fixed lifts.

#### **Movement Confidence**

Providing steady, safe, and comfortable transfers for both patient and caregiver.



*SteadyTrack is one of the sturdiest freestanding lift stands on the market.*

# SteadyTrack


## Two Post Lift Stand System

mackworth

### SteadyTrack™ Patient Lift System

Available in four lengths:

Part Number	Product Description
1002TRKTR711	Std Track – Length: 95" [241cm] *Max Length for std Track is 95" [241 cm]
1002TRKTRMID12	Midline Track – Length: 144" [304.8 cm]
1002TRKTRMID16	Midline Track – Length: 198" [502.9 cm]
1002TR7HD	Heavy Duty Track – Length: 264" [670.6 cm]

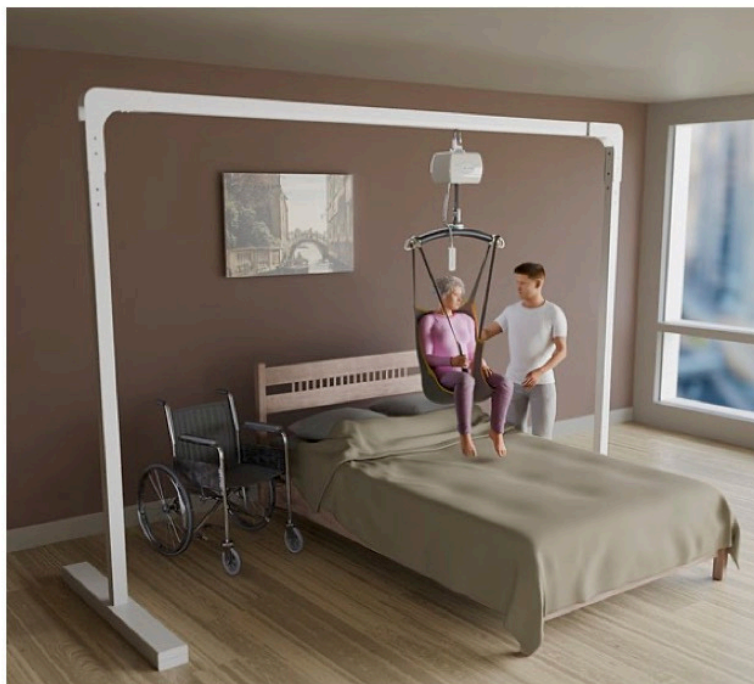

### Technical Specifications

Over-all Height:	85" – 93"
Lifting Range, Height:	73.5" – 81.5"
Overall Length:	*93.35" – 275.60"
Lift Travel Length:	*74.5" – 177.5"
Distance Between Vertical Supports:	*99.25" – 202"
Distance (Inside) between Post Bases:	*81.10" – 263.99"
Base Length:	45"
Base Width:	6"
Maximum Load:	600 lbs. [272 kgs]

\*Depending on track length. Available track lengths are 95", 144", 198" and 264".  
Please Note: The 144", 198" and 264" length are higher profile for added strength.

